

## Leica Flexline TS0x Quick Start

Required: *Leica Firmware 3.01 or newer and Carlson SurvCE 3.0 or higher*

The Leica TS0X Flexline Total Stations can accept both GSI and GeoCOM commands.


To use the GSI protocol, use the **Leica direct, TPS700 driver**. To use Geocom, use the **Leica Direct, TS0x driver**.

**Please follow the steps below to ensure proper configuration of the total station:**


1) On the total station, choose 5- Settings



2) Choose 6-Interface

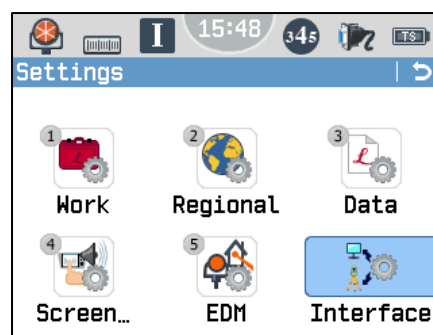


3) Confirm that your port is configured to match what you have selected in SurvCE.

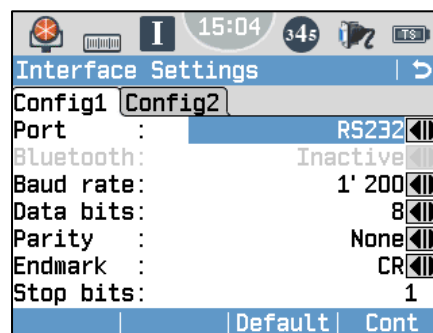

4) Hit the back arrow to go back one menu level.

5) Choose 3- data.

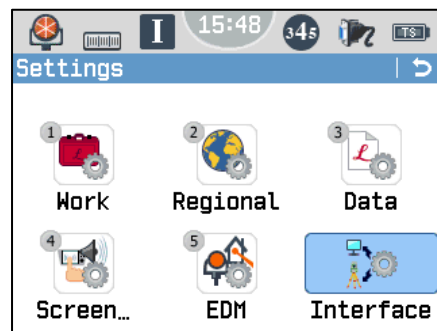

6) Confirm that Data Output is set to **Internal Memory**.

This will prevent GSI commands from coming out of your interface port, and causing communication errors.

